



**STRIKER**  
20<sup>th</sup> ANNIVERSARY



# STRIKER SQ1862



**JEBSEN & JESSEN**  
TECHNOLOGY | Dry Bulk

Proud Distributor in Indonesia



# TRACKED **SCREEN**

# SQ1862 Features



**Main Chassis** - Main chassis members are constructed from welded beams. These members are engineered to withstand the stresses exerted upon them by both road transport and operation of the plant.

**Belt Feeder** - The belt feeder is 1200mm (3'11") wide 4-ply belt. The feeder is positioned beneath the hopper and grizzly. Power is provided to the feeder via a hydraulic motor and gearbox arrangement.



**Feed Hopper** - With 9m<sup>3</sup> (12yd<sup>3</sup>) capacity and hydraulic tipping grizzly, this hopper is ideal for achieving maximum production with this plant.

**Remote Tipping Grizzly** - A 1050mm (3'5") wide belt feeder transfers material onto the screen feed conveyor.

**Track Frame** - Manufactured from heavy-duty frame steel with 3840mm (12'7") longitudinal centres along with 500mm (1'8") wide tracks as standard with an overall track width of 2928mm (9'7").

**Screen Feed Conveyor** - A 1200mm (3'11") wide 3-ply conveyor transfers material from the feeder up to the 2-deck screen. The main frame for the conveyor is supported on the chassis and has a folding head section for lowering during transport of the plant.

**Fines Product Conveyor** - Tail conveyor consists of a 1500mm (4'11") wide 3-ply conveyor belt mounted under the screen to stockpile the bottom size product, which passes through the screen bottom deck. This conveyor is direct driven by a large capacity hydraulic motor. The tail conveyor folds and retracts for transport by hydraulic means.

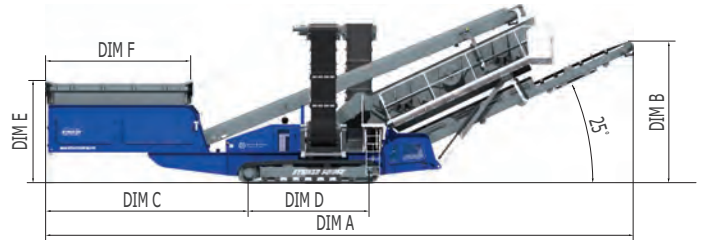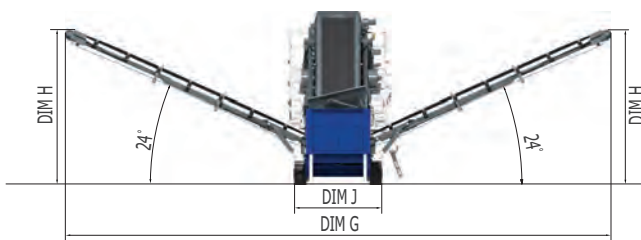

SQ1862	WORKING DIMENSIONS									TRANSPORT			
	A	B	C	D	E	F	G	H	J	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	19109	4599	6438	3840	3337	4697	18352	5184	2928	3046	3460	18114	36T
IMPERIAL	62' 8"	15' 1"	21' 1"	12' 7"	10' 11"	15' 5"	60' 3"	17'	9' 7"	10'	11' 4"	59' 5"	79,366lbs

\*- Weight Variable With Options

## Technical Specification

**Hopper**  
Capacity - 9m<sup>3</sup> (12yd<sup>3</sup>)

**Screenbox**  
Top Deck - 18' x 6' (5.49m x 1.83m)  
Bottom Deck - 18' x 6' (5.49m x 1.83m)  
Angle - 20° - 30°

**Side Conveyors**  
Width - 800mm (2'8")  
Discharge Height (adj) - 5184mm (17')

**Feeder Lift Product Conveyor**  
Width - 1200mm (3'11")

**Tracks**  
Length - 3840mm (12'7")  
Width - 500mm (1'8")

**Performance**  
Capacity (up to) - 500T/hr

**Power Pack**  
Engine Power - 96kW  
Diesel Tank - 400Litre (88gal)  
Hydraulic Tank - 500Litre (110gal)

**Operating Dimension**  
Length - 19109mm (62'8")  
Width - 18352mm (60' 3")  
Height - 5840mm (19'2")  
Weight - 36T (79,366lbs)

**Transport Dimension**  
Length - 18114mm (59'5")  
Width - 3046mm (10')  
Height - 3460mm (11'4")

**Options:**  
Dust Suppression, Canvas Covers,  
Water Pump

\*Subject to change without prior notice.

**Side Product Conveyors** - Any material not passing the bottom deck will be diverted onto the side discharge conveyors. Side conveyors consist of a 800mm (2'8") wide 3 ply conveyor belts fitted to a heavy duty folding conveyor frame. Side conveyors fold for transport by hydraulic means. Both conveyors are fitted with chevron belts. The side product conveyors stack to a height of 5184mm (17') and are 18352mm (60'3") in total width from head drum to head drum.

**Screen Box** - 18ft x 6ft (5.49m x 1.83m) Dual Deck Vibrating Screen. The screen is set up to accept cross-tensioned. Bolt in hardox liners are provided in the feed area to protect the screen from erosion. The screen is isolated on coil springs, supported front and rear. The shaft drive is coupled to a hydraulic drive motor.

**Access Walkways** - Galvanised walkways give full access to all sides of the screenbox for ease of maintenance and screen mesh change, and do not require folding for transport.

**Powerpack** - The engine is a CAT C4.4 diesel engine 96kW. Engine diagnostics and readouts are displayed on the Plant Control Screen. A 400-litre (88gal) fuel tank positioned in the chassis.

Proud Distributor in Indonesia

**PT. Jebesen & Jessen Technology Indonesia**

Graha Inti Fauzi, 7th Floor  
Jl Buncit Raya, No 22  
12510 Jakarta, Indonesia

Contact Us At : +62 21 27537030

Email Us At : [contact\\_drybulk@jjsea.com](mailto:contact_drybulk@jjsea.com)

Visit Our Website: [www.drybulk.jjsea.com](http://www.drybulk.jjsea.com)



**JEBSEN & JESSEN**  
TECHNOLOGY | Dry Bulk

While Striker Australia Pty Ltd makes every endeavour to ensure the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SP02SI38-1900