



STRIKER

20th ANNIVERSARY



STRIKER SQR1652



JEBSEN & JESSEN
TECHNOLOGY | Dry Bulk

Proud Distributor in Indonesia



TRACKED SCREEN

SQR1652 Features



Feeder - Variable speed steel pan or belt apron feeder is fitted 1200mm (4') wide.

Vibrating Screen - The vibrating screen is a two deck 16' x 5' (4.88m x 1.52m). In the interest of efficient fine screening the screen angle can change from 15° to 19°.

Access Walkways - Easily adjustable access walkways are fitted to allow uninterrupted movement around both sides and the front of the screen unit. Fines Product Conveyor - The fines product conveyor is an 900mm (3') wide heavy duty type conveyor that folds hydraulically for transport.

Oversize Product Conveyor - A 1500mm (4'11") wide variable speed chevron type belt that is cleated to prevent roll back of material. The return rollers are rubber disc type to help clean the belt and assist with correct tracking of the belt.

Technical Specification

Feeder

Capacity - 8.7m³ (11.7yd³)
Type - Belt or Apron with Heavy- Duty Liners

Screenbox

Top Deck - 16' x 5' (4.88m x 1.52m)
Bottom Deck - 16' x 5' (4.88m x 1.52m)
Angle - 15° - 19°

Fines Product Conveyor

Width - 900mm (2'11")
Discharge Height - 4350mm (14'3")

Middle Product Conveyor

Width - 900mm (2'11")
Discharge Height - 4106mm (13'6")

Oversize Product Conveyor

Width - 1500mm (4'11")
Discharge Height - 3550mm (11'8")

Tracks

Width - 400mm (1'4")

Performance

Capacity (up to) - 450T/hr

Power Pack

Engine Power - 96kW
Diesel Tank - 400Litre (88gal)
Hydraulic Tank - 460Litre (101gal)

Operating Dimension

Length - 14789mm (48'6")
Width - 14358mm (47'1")
Height - 4521mm (14'10")
Weight - 30.4T (67,021lbs)

Transport Dimension

Length - 14115mm (46'4")
Width - 2998mm (9'10")
Height - 3411mm (11'2")

Options:

Top deck Bofor bars, top deck punch plate, Heavy duty top finger deck, bottom finger deck, Radio Remote Control for Tracks, plate apron feeder (replaces belt feeder).

*Subject to change without prior notice.


Hopper - 8.7m³ (11.7yd³) hopper is fitted standard above the feeder.

Middle Product Conveyor - An 900mm (2'11") wide variable speed chevron type belt that is cleated to prevent rollback of material. The return rollers are rubber disc type to help clean the belt and assist with correct tracking of the belt.


Powerpack - Caterpillar type C4.4 turbo charged water cooled engine rated 96kW. All housed in a vandal proof compartment.

Air Cleaner - An 8" Donaldson twin element system complete with a Dust Buster pre cleaner is fitted.

Track Controls - Tracking control is mounted at the rear of the plant and is fitted with a heavy duty socket.

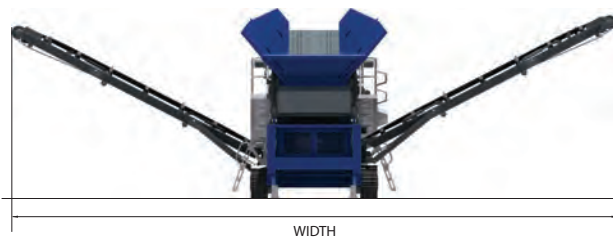

WIDTH

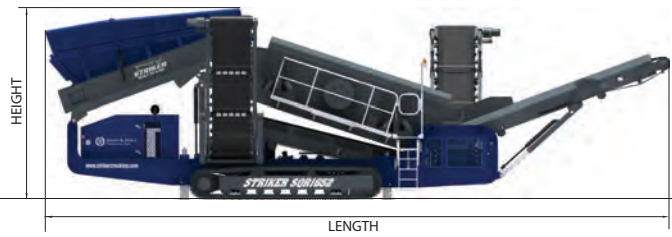

LENGTH

SQR1652	WORKING DIMENSIONS			TRANSPORT			
	WIDTH	HEIGHT	LENGTH	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	14358	4521	14789	2998	3411	14115	30.4T
IMPERIAL	47' 1"	14' 10"	48' 6"	9' 10"	11' 2"	46' 4"	67,021lbs

*- Weight Variable With Options

Proud Distributor in Indonesia

PT. Jebesen & Jessen Technology Indonesia

Graha Inti Fauzi, 7th Floor
JI Buncit Raya, No 22
12510 Jakarta, Indonesia

Contact Us At : +62 21 27537030
Email Us At : contact_drybulk@jjsea.com
Visit Our Website: www.drybulk.jjsea.com



JEBSEN & JESSEN
TECHNOLOGY | Dry Bulk

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SP02SI07-1902